


# MB3505 THRU MB3510

Io

# SINGLE PHASE 35 AMP BRIDGE RECTIFIERS



## FEATURES


- \* Superior thermal design
- \* 400 amperes surge capability
- \* Mounting: Hole thru for #8 screw
- \* 1/4" universal faston terminal

## VOLTAGE RANGE

50 to 1000 Volts

## CURRENT

35.0 Amperes

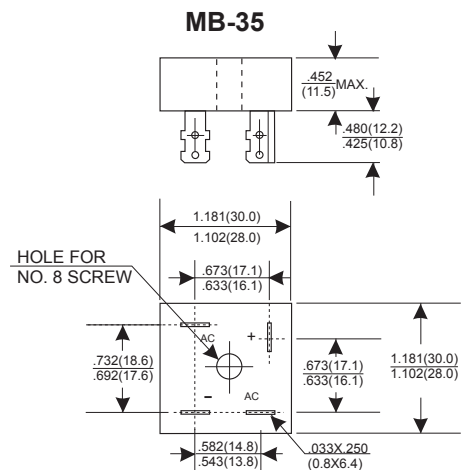

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

[illegible]