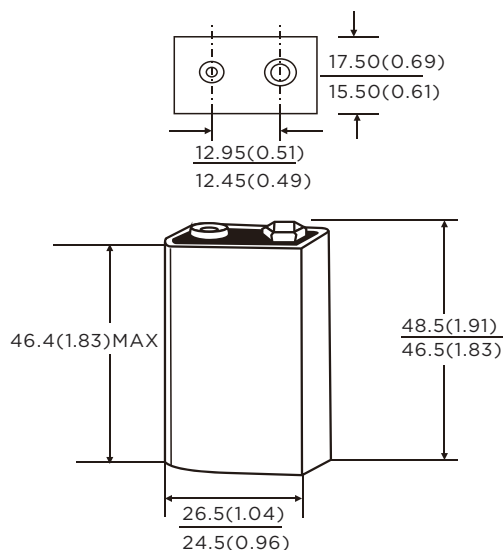


6F22(1604D)



Dimensions



Unit:mm(inch)

Super Heavy Duty Battery

Specifications

Chemical System:	Zinc-Manganese Dioxide (Zinc Chloride Electrolyte)
IEC Name:	6F22
ANSI/NEDA:	1604D(9V)
Westinghouse Model:	6F22
Average Weight:	36g
Dimension(LxWxH)	25.5 ^{±1} x16.5 ^{±1} x47.5 ^{±1} mm 1 ^{±0.04} x0.65 ^{±0.04} x1.87 ^{±0.04} inch
Terminals:	Flat
Nominal Voltage:	9.0Volts
Capacity:	190mAh (Rated at 5mA to 4.8V)
Operating Temperature:	-18°C -55°C
Storage Temperature:	15°C -25°C
Relative Humidity:	60±15%
Jacket :	Aluminum Foil Label

Usage Guide



Electronic games



Multimeter



Microphone

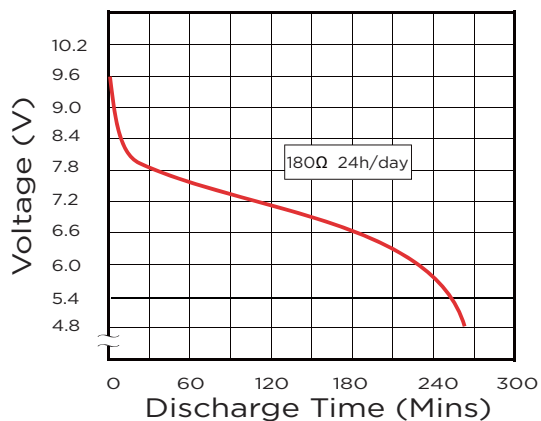
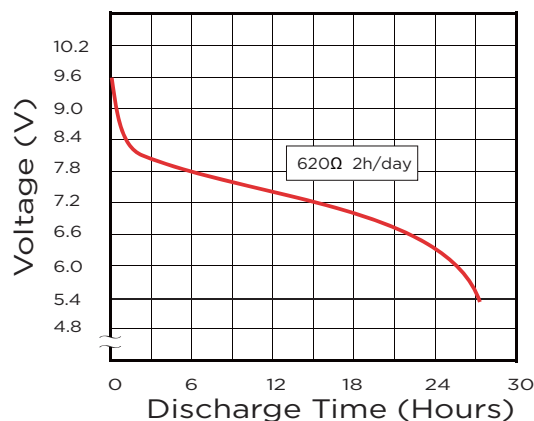
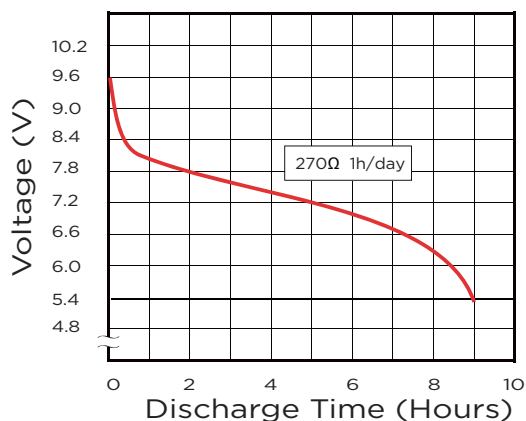
Cautions

Storage


Store the battery in a cool, dry and well-ventilated area.

Handling

- 1) Never charge the battery. Do not heat or disposed in fire or water. Do not modify or disassemble the battery. Do not short-circuit positive (+) and negative (-) terminals. Keep away from metal or other conductive materials.
- 2) Keep away from infants. If infant happens to swallow the battery, consult a doctor immediately.
- 3) When the battery is stored or disposed, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touch each other.
- 4) In case the battery electrolyte happen to come into mouth,gargle well enough and consult a doctor immediately.

6F22(1604D)
Super Heavy Duty Battery
ANSI/IEC Standard Testing
Typical characteristics 21°C

Notice:

Environmental elements comply with 2006/66/EC and US LAW 104-142 requirements. This data sheet is typical information specific to products manufactured at the time of its publication. For the latest information, contact us at: info@westinghousebattery.com.

, and WESTINGHOUSE are trademarks of Westinghouse Electric Corporation. Used under license by Camelion Battery, Ltd. All Rights Reserved.