

# HA13119

T-74-05-01

## Dual 5.5 W Audio Power Amplifier

The HA13119 is power IC designed for car radio and car stereo amplifiers. At 13.2 V to 4  $\Omega$  load, this power IC provides output power of 5.5 W with 10 % distortion.

It is easy to design as this IC employs internal each protection circuit and the new small package.

### Features

- Low distortion
  - THD = 0.1 % typ  
( $P_o = 0.5$  W,  $f = 100$  Hz to 10 kHz)
  - THD = 1 % typ  
( $P_o = 3$  W,  $f = 70$  Hz to 40 kHz)
- Internal each protection circuits
  - Surge protection circuit (more than 50 V)
  - Thermal shut-down circuit
  - Ground fault protection circuit
  - Power supply fault protection circuit
- Low external components count

Table 1 Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Item	Symbol	Rating	Unit	Note
Operating supply voltage	$V_{cc}$	18	V	
DC supply voltage	$V_{cc}$ (DC)	26	V	1
Peak supply voltage	$V_{cc}$ (peak)	50	V	2
Output current	$I_o$ (peak)	4	A	3
Power dissipation	$P_r$	15	W	4
Thermal resistance	$\theta_j - c$	3.5	$^\circ\text{C/W}$	
Junction temperature	$T_j$	150	$^\circ\text{C}$	
Operating temperature	$T_{opr}$	$-30$ to $+80$	$^\circ\text{C}$	
Storage temperature	$T_{stg}$	$-55$ to $+125$	$^\circ\text{C}$	

Notes: 1. Value at  $t = 30$  sec.  
 2. Value at width  $t_w = 200$  ms and rise time  $t_r = 1$  ms.  
 3. Per channel  
 4. Per package

### Ordering Information

Type No.	Package
HA13119	SP-15T



Hitachi America, Ltd. • Hitachi Plaza • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1819 • (415) 589-8300

353

HA13119

T-74-05-01

Table 2 Electrical Characteristics ( $V_{CC} = 13.2 \text{ V}$ ,  $f = 1 \text{ kHz}$ ,  $R_L = 4 \Omega$ ,  $T_a = 25^\circ \text{C}$ )

## 1 channel operation

Item	Symbol	Min	Typ	Max	Unit	Test conditions
Quiescent current	$I_Q$	—	80	160	mA	$V_{in} = 0 \text{ V}$
Input bias voltage	$V_B$	—	—	10	mV	$V_{in} = 0 \text{ V}$ , $R_g = 10 \text{ k}\Omega$
Voltage gain	$G_v$	48	50	52	dB	$V_{in} = -50 \text{ dBm}$
Voltage gain difference	$\Delta G_v$	—	—	+1.5	dB	$V_{in} = -50 \text{ dBm}$
Output power	$P_{out}$	5.0	5.5	—	W	$R_L = 4 \Omega$ $V_{CC}=13.2 \text{ V}$
		—	6.5	—		THD = 10 % $V_{CC}=14.4 \text{ V}$
Total harmonic distortion	THD	—	0.05	0.5	%	$P_{out} = 1.5 \text{ W}$
Wide band noise	WBN	—	0.6	1.2	mV	$R_g = 10 \text{ k}\Omega$ , BW = 20 Hz to 20 kHz
Supply voltage rejection ratio	SVR	35	50	—	dB	$R_g = 600 \Omega$ , $f = 500 \text{ Hz}$
Input impedance	$R_{in}$	—	33	—	$\text{k}\Omega$	$f = 1 \text{ kHz}$ , $V_{in} = -50 \text{ dBm}$
Roll off frequency	$f_L$	—	55	—	Hz	$\Delta G_v = -3 \text{ dB}$ Low
	$f_H$	—	50	—	kHz	from $f = 1 \text{ kHz}$ Ref High
Cross-talk	C.T	40	55	—	dB	$R_g = 600 \Omega$ , $V_{in} = -50 \text{ dBm}$

## 2 channel operation


Item	Symbol	Min	Typ	Max	Unit	Test conditions
Output power	$P_{out}$	—	5.3	—	W	THD = 10 %
Total harmonic distortion	THD	—	0.10	—	%	$P_{out} = 1.5 \text{ W}$



354 Hitachi America, Ltd. • Hitachi Plaza • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1819 • (415) 589-8300

## Typical Application Circuit

T-74-05-01

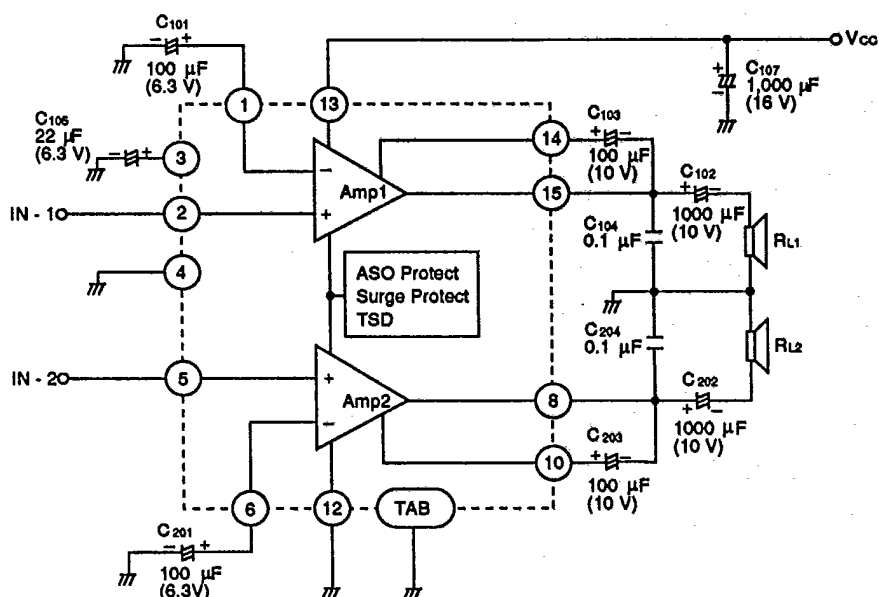

Note: C104, C204 must be non secondary resonance type (non inductive) polyester film capacitor for keeping stability.




Hitachi America, Ltd. • Hitachi Plaza • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1819 • (415) 589-8300


355

HA13119

T-74-05-01

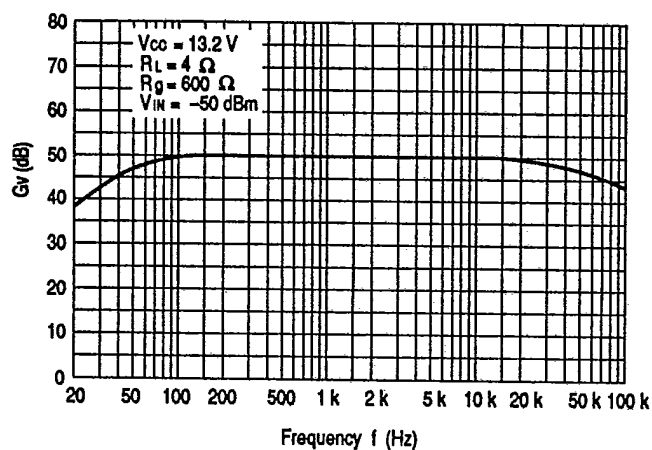

Voltage Gain vs. Frequency

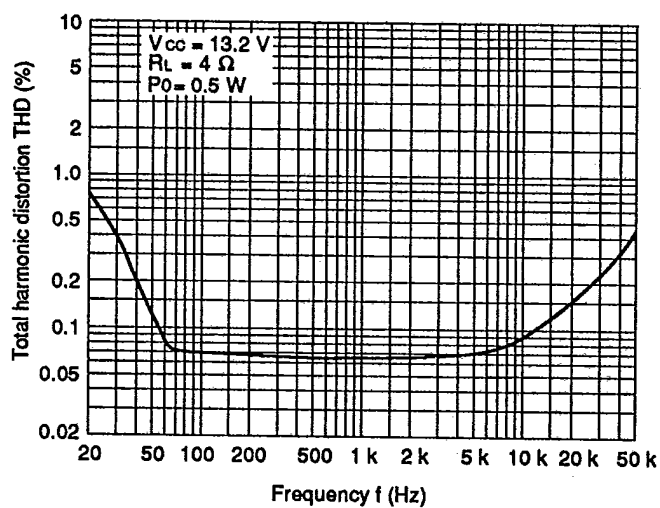


Total Harmonic Distortion vs. Frequency




T-74-05-01

HA13119

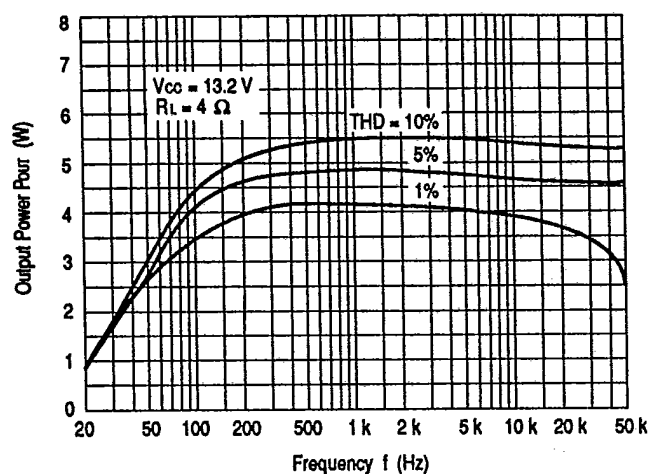

Output Power vs. Frequency

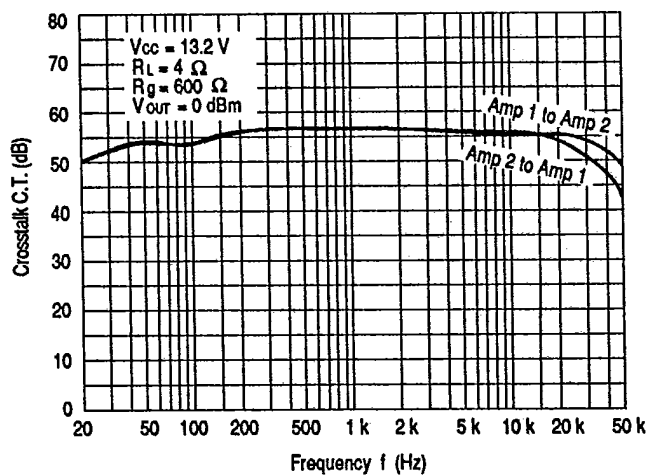

Cross-talk vs. Frequency




Hitachi America, Ltd. • Hitachi Plaza • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1819 • (415) 589-8300


357

HA13119

T-74-05-01

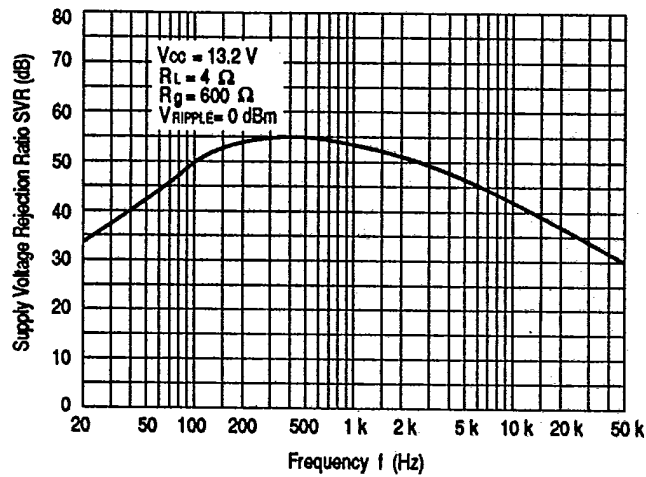


Supply Voltage Rejection Ratio vs. Frequency

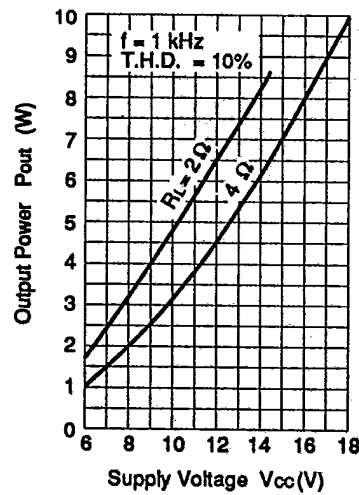


Output Power vs. Supply Voltage



T-74-05-01

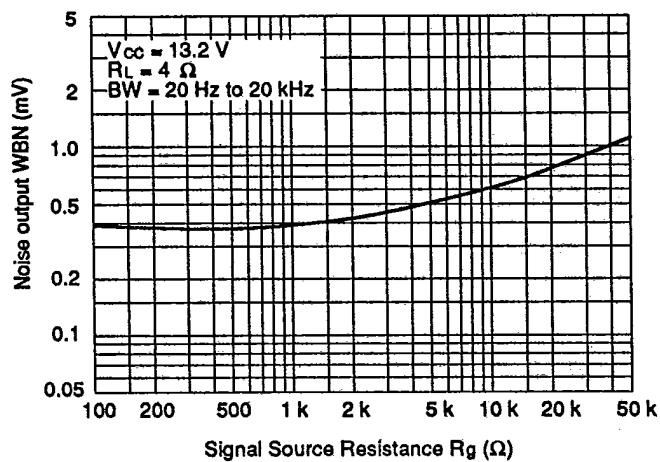

Noise Output vs. Signal Source Resistance

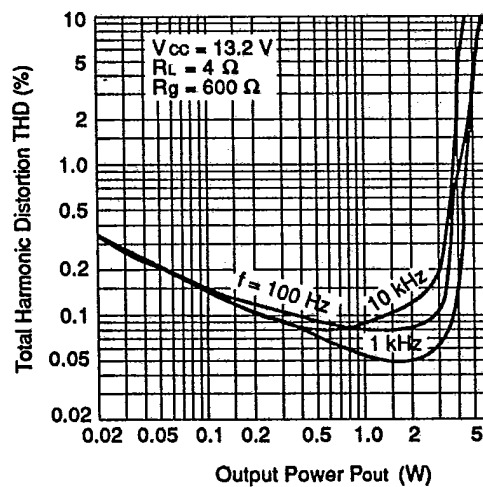

Total Harmonic Distortion vs. Output Power




Hitachi America, Ltd. • Hitachi Plaza • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1819 • (415) 589-8300

359

HA13119

T-74-05-01

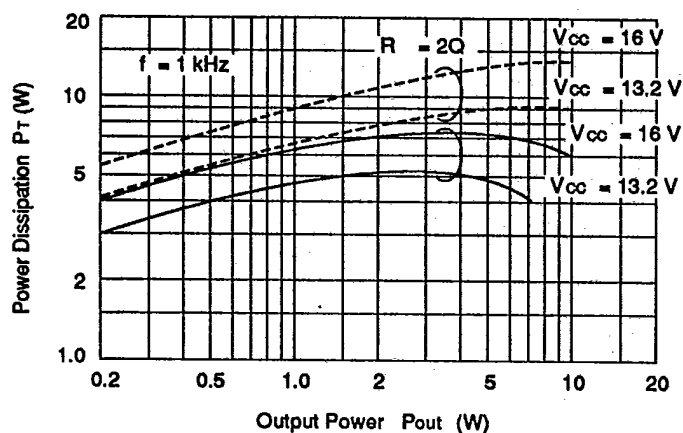

Power Dissipation vs. Output Power



360 Hitachi America, Ltd. • Hitachi Plaza • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1819 • (415) 589-8300