

SANYO

No.2681B

LA4597**2-Channel Power Amp
for Radio-Cassette Recorders****Functions**

- On-chip thermal shutdown circuit
- On-chip standby switch

Maximum Ratings at $T_a = 25^\circ\text{C}$



Maximum Supply Voltage	V_{CC} max	18	unit
Allowable Power Dissipation	P_d max	With $100 \times 100 \times 1.5\text{mm}^3$ Al heat sink	11.4 W
Operating Temperature	T_{opr}	-20 to +75	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to +150	$^\circ\text{C}$

Operating Conditions at $T_a = 25^\circ\text{C}$

Recommended Supply Voltage	V_{CC}	9, 12	unit
Recommended Load Resistance	R_L	3.2	Ω
Operating Voltage Range	$V_{CC\text{ op}}$	4.2 to 16.0	V

Operating Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = 9\text{V}$, $f = 1\text{kHz}$, $R_g = 600\Omega$, $R_L = 3.2\Omega$, $V_G = 50\text{dB}$

			min	typ	max	unit
Quiescent Current	I_{cco}		10	20	40	mA
Voltage Gain	V_G		47	49	51	dB
Output Power (1)	P_{o1}	THD = 10%	2.2	2.9		W
Output Power (2)	P_{o2}	THD = 10%, $V_{CC} = 12\text{V}$		4.6		W
Total Harmonic Distortion	THD	$V_o = 2\text{V}$		0.3	1.0	%
Input Resistance	r_i		20	30		$k\Omega$
Output Noise Voltage	V_{NO1}	$R_g = 0, \text{B.P.F.} = 20\text{Hz to } 20\text{kHz}$		0.4	1.0	mV
	V_{NO2}	$R_g = 10k\Omega, \text{B.P.F.} = 20\text{Hz to } 20\text{kHz}$		0.6	2.0	mV
Ripple Rejection	R_r	$R_g = 0, f_r = 100\text{Hz}, V_{CCr} = 150\text{mV}$	40	50		dB
Channel Separation	CH Sep	$R_g = 10k\Omega, V_o = 0\text{dB}$	45	55		dB
Standby Current	I_{sd}				10	μA




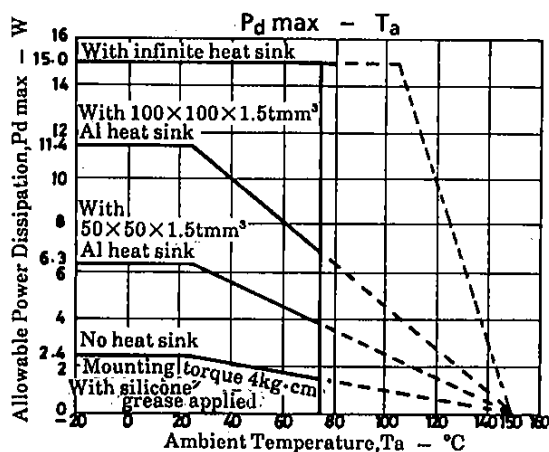
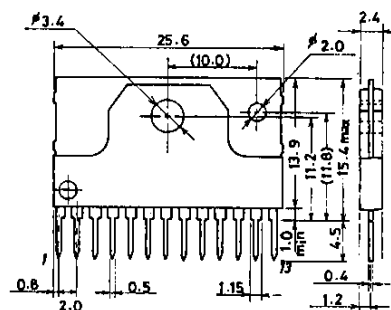
**Package Dimensions
(unit: mm)
3107**









SANYO: SIP13H

SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE, Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN


3078KI/O287TA/O157TA, TS No.2681 - 1/4

Test Circuit and External Constants

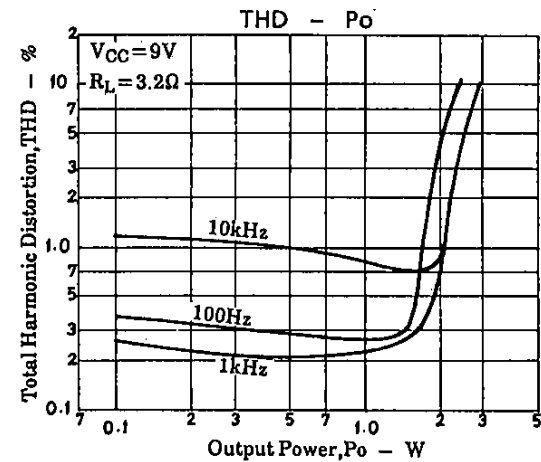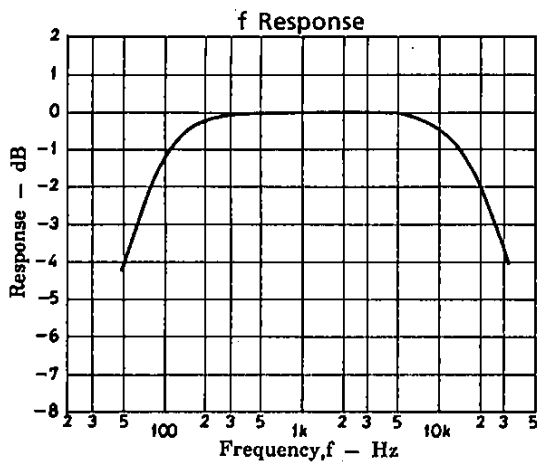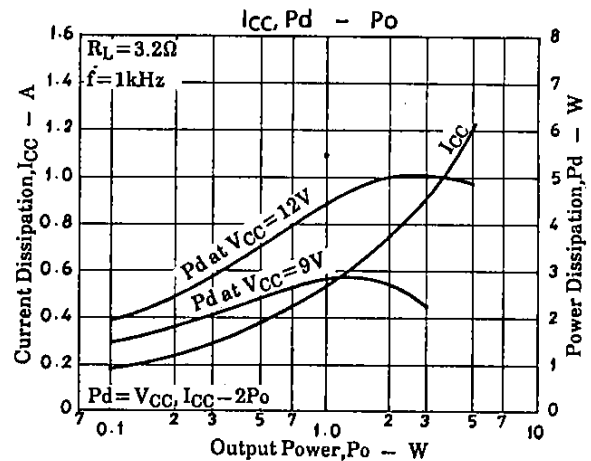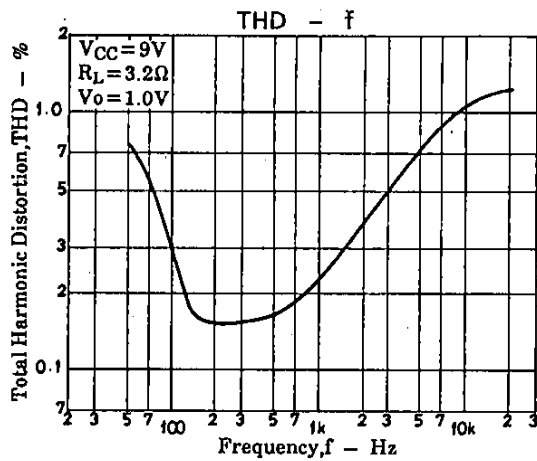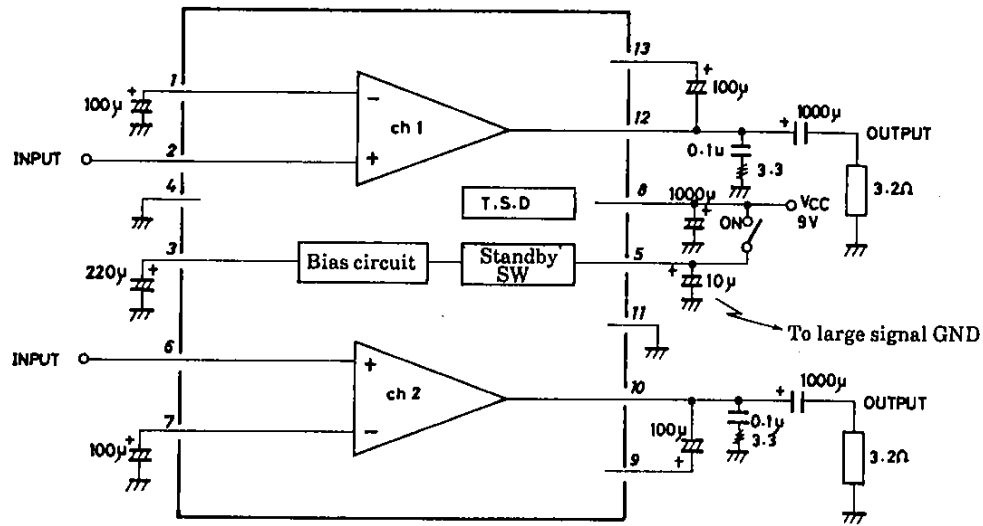

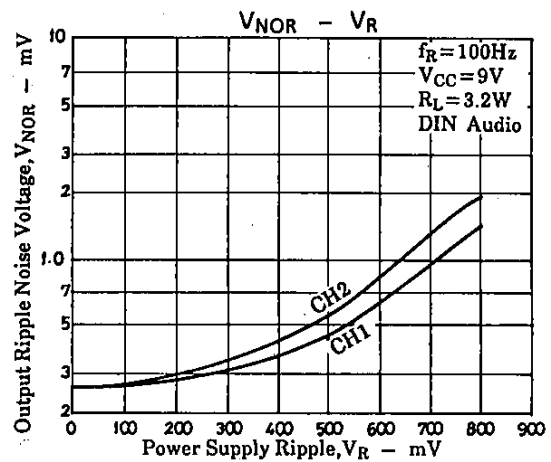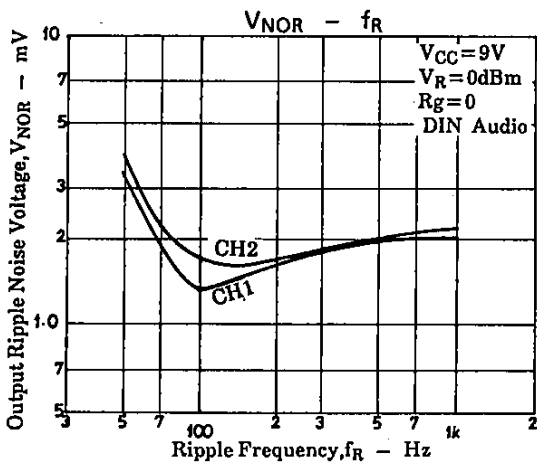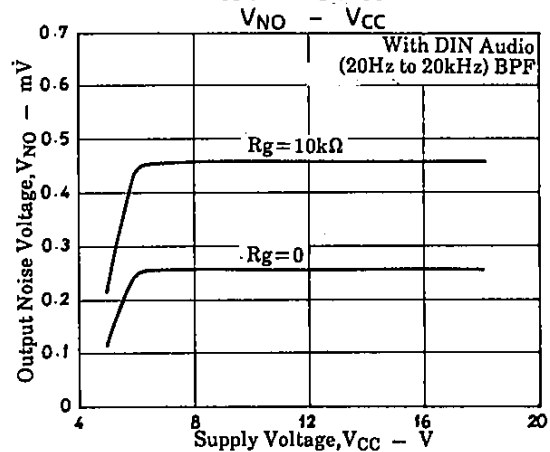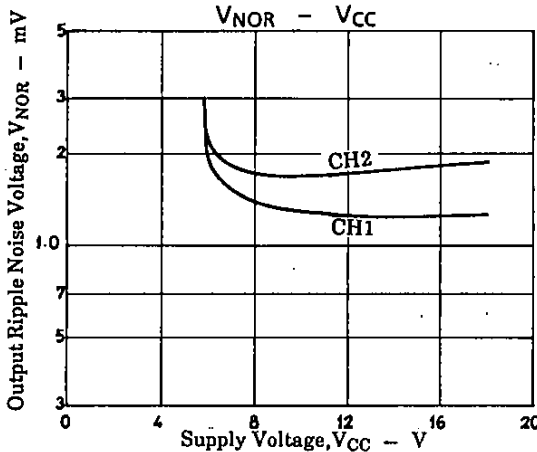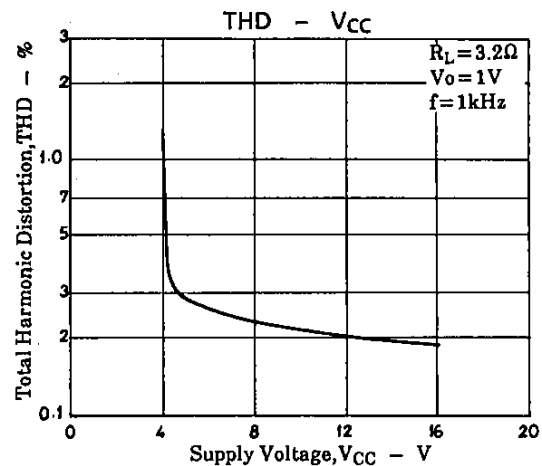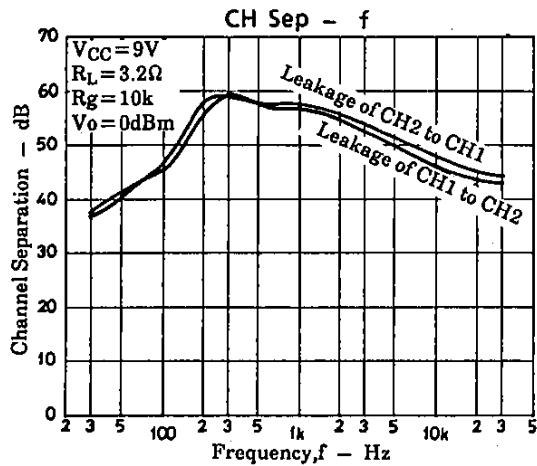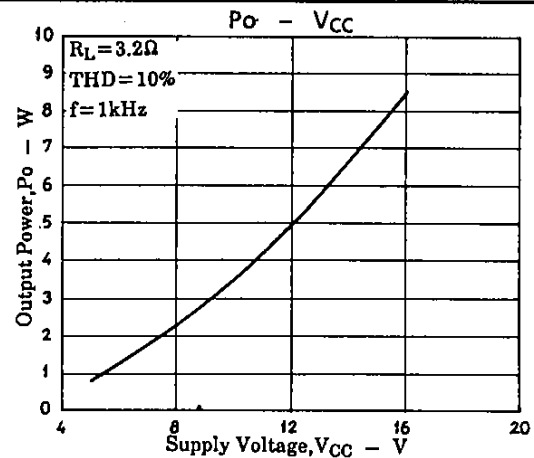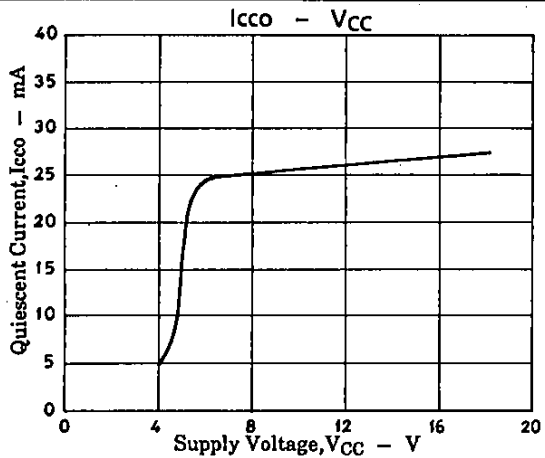

Sample BTL

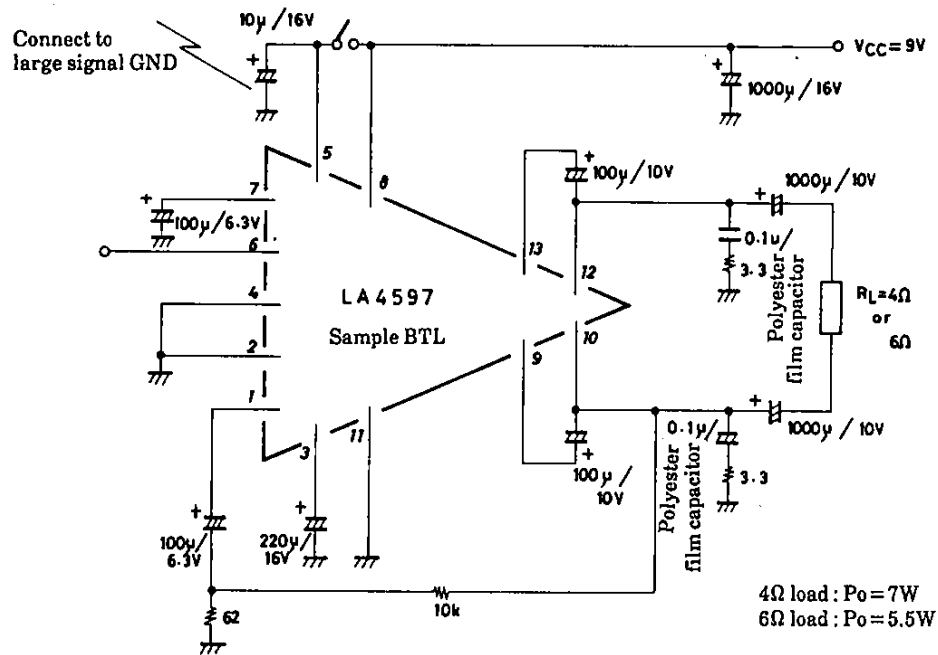

Unit (capacitance: F)

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.