

1. Scope

The present specifications shall apply to Sanken silicon diode, FMG-G26S.

2. Outline

| | | |
|--------------|------------------------------------|------------------------------------|
| Type | Silicon Rectifier Diode | |
| Structure | Resin Molded | Flammability: UL94V-0 (Equivalent) |
| Applications | High Frequency Rectification, etc. | |


3. Absolute maximum ratings

| No. | Item | Symbol | Unit | Rating | Conditions |
|-----|--------------------------------|-------------|-------------------------|-----------|------------------------------------|
| 1 | Transient Peak Reverse Voltage | V_{RSM} | V | 600 | |
| 2 | Peak Reverse Voltage | V_{RM} | V | 600 | |
| 3 | Average Forward Current | $I_{F(AV)}$ | A | 4.0 | $T_c=109^\circ\text{C}$, sinewave |
| 4 | Peak Surge Forward Current | I_{FSM} | A | 50 | 10msec. Half sinewave, one shot |
| 5 | I^2t Limiting Value | I^2t | A^2s | 12.5 | |
| 6 | Junction Temperature | T_j | $^\circ\text{C}$ | -40~+150 | |
| 7 | Storage Temperature | T_{stg} | $^\circ\text{C}$ | -40~+150 | |
| 8 | Screwing Torque | | $\text{N}\cdot\text{m}$ | 0.59 | |
| 9 | Dielectric Strength | | kV | A. C. 1.0 | Between lead and case (1 min.) |


4. Electrical characteristics ($T_a=25^\circ\text{C}$, unless otherwise specified)

| No. | Item | Symbol | Unit | Value | Conditions |
|-----|--|---------------|---------------------------|----------|--|
| 1 | Forward Voltage Drop | V_F | V | 2.5 max. | $I_F=4.0\text{A}$ |
| 2 | Reverse Leakage Current | I_R | mA | 0.5 max. | $V_R=V_{RM}$ |
| 3 | Reverse Leakage Current Under High Temperature | $H\cdot I_R$ | mA | 3.0 max. | $V_R=V_{RM}$, $T_a=100^\circ\text{C}$ |
| 4 | Reverse Recovery Time | trr1 | ns | 100 max. | $I_F=I_{RP}=100\text{mA}$ 90% Recovery point, $T_j=25^\circ\text{C}$ |
| | | trr2 | ns | 50 max. | $I_F=100\text{mA}$, $I_{RP}=200\text{mA}$ 75% Recovery point, $T_j=25^\circ\text{C}$ |
| 5 | Thermal Resistance | $R_{th(j-c)}$ | $^\circ\text{C}/\text{W}$ | 4.0 max. | Between Junction and case |

5. Characteristics

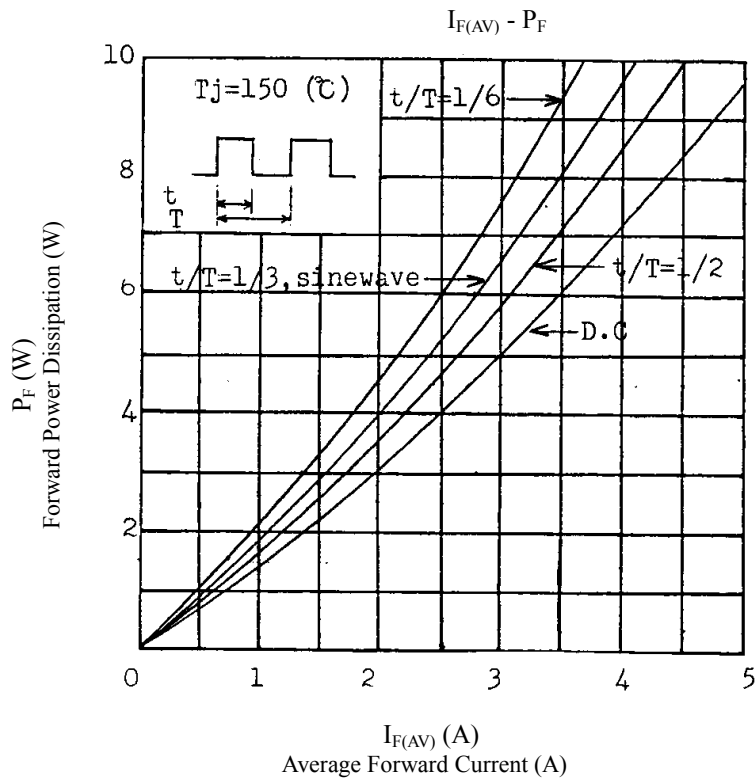


6. Derating

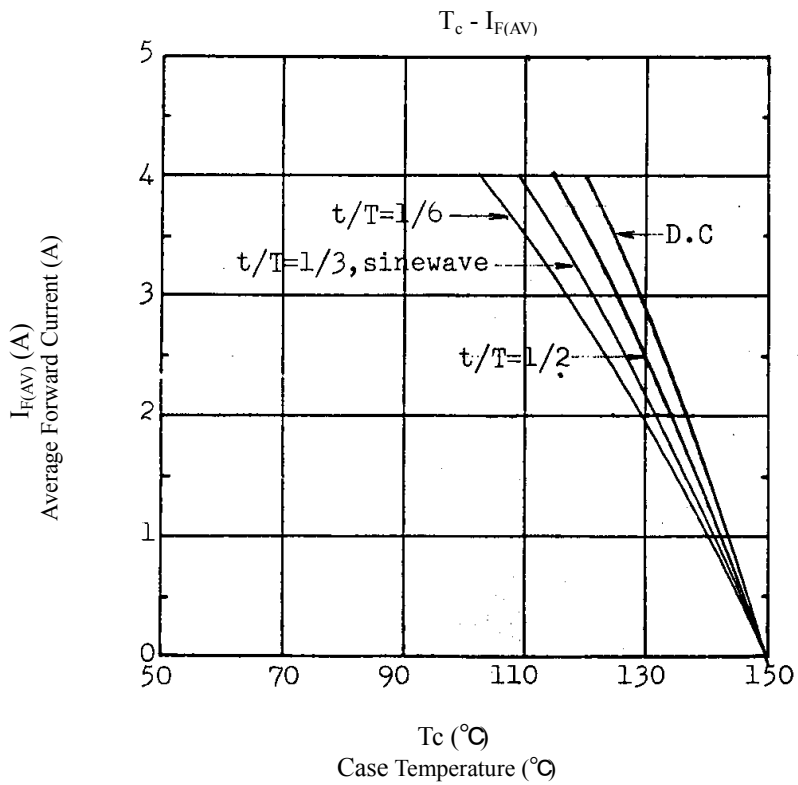

7. Package information

7-1 Package type, physical dimensions and material

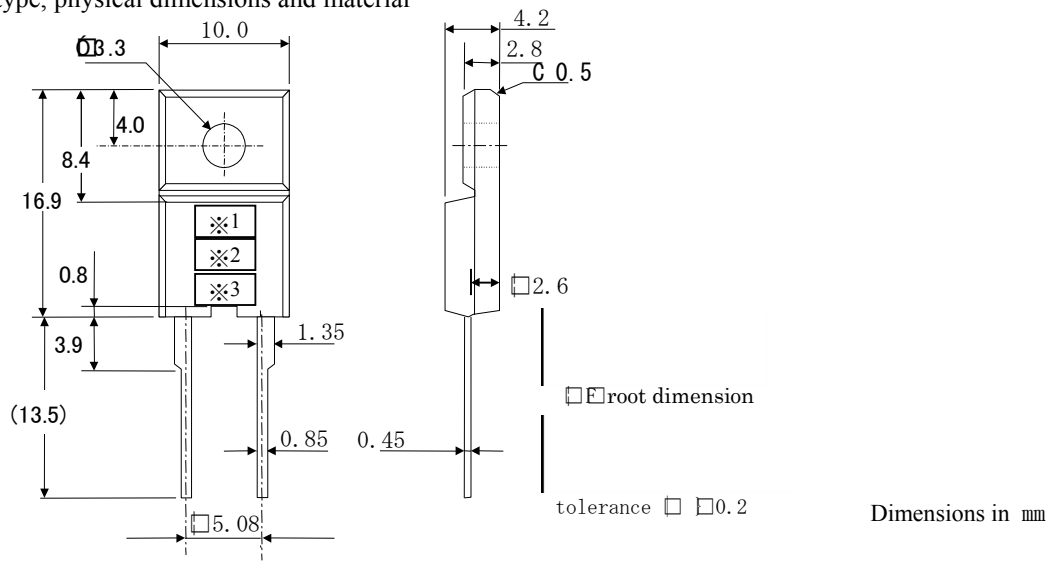

7-2 Appearance

The body shall be clean and shall not bear any stain, rust or flaw.

7-3 Marking

| Type Name | Marking | | |
|-----------|-----------------|----------------|---|
| | *1 Type Name | *2 Polarity | *3 Lot number |
| FMG-G26S | FMGG26 | S | 1st letter: Last digit of year 2nd letter: Month From 1 to 9 for Jan. to Sep., O for Oct., N for Nov., D for Dec. 3rd & 4th letter: Day ex.4907 (Sep.7, 2004) |