

NPN SWITCHING SILICON TRANSISTOR
Qualified per MIL-PRF-19500/251
Devices

 2N2218
 2N2218A
 2N2218AL

 2N2219
 2N2219A
 2N2219AL

Qualified Level
 JAN
 JANTX
 JANTXV
 JANS

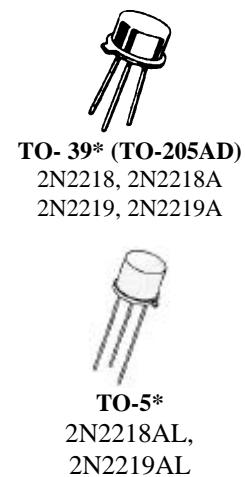
MAXIMUM RATINGS

Ratings	Symbol	2N2218 2N2219	2N2218A; L 2N2219A; L	Unit
Collector-Emitter Voltage	V _{CEO}	30	50	Vdc
Collector-Base Voltage	V _{CBO}	60	75	Vdc
Emitter-Base Voltage	V _{EBO}	5.0	6.0	Vdc
Collector Current	I _C	800		mAdc
Total Power Dissipation @ T _A = +25°C ⁽¹⁾	P _T	0.8		W
@ T _C = +25°C ⁽²⁾		3.0		W
Operating & Storage Junction Temp. Range	T _{op} , T _{stg}	-55 to +200		°C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	R _{θJC}	59	°C/W

 1) Derate linearly 4.6 mW/°C above T_A > +25°C

 2) Derate linearly 17.0 mW/°C above T_C > +25°C


*See appendix A for package outline

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage I _E = 10 mAdc	V _{(BR)CEO}	30		Vdc
2N2218; 2N2219 2N2218A; L; 2N2219A; L		50		
Emitter-Base Cutoff Current V _{EB} = 5.0 Vdc V _{EB} = 6.0 Vdc V _{EB} = 4.0 Vdc	I _{EBO}	10 10 10		μAdc ηAdc
2N2218; 2N2219 2N2218A; L; 2N2219A; L All Types				
Collector-Base Cutoff Current V _{CE} = 30 Vdc V _{CE} = 50 Vdc	I _{ICES}	10 10		ηAdc
2N2218; 2N2219 2N2218A; L; 2N2219A; L				

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
Collector-Base Cutoff Current V _{CB} = 50 Vdc			10	
V _{CB} = 60 Vdc		10		µAdc
V _{CB} = 60 Vdc		10		µAdc
V _{CB} = 75 Vdc		10		µAdc

ON CHARACTERISTICS (3)

Forward-Current Transfer Ratio I _C = 0.1 mAdc, V _{CE} = 10Vdc	2N2218 2N2219 2N2218A; 2N2218AL 2N2219A; 2N2219AL		20 35 30 50		
I _C = 1.0 mAdc, V _{CE} = 10 Vdc	2N2218 2N2219 2N2218A; 2N2218AL 2N2219A; 2N2219AL		25 50 35 75	150 325 150 325	
I _C = 10 mAdc, V _{CE} = 10 Vdc	2N2218 2N2219 2N2218A; 2N2218AL 2N2219A; 2N2219AL		35 75 40 100		
I _C = 150 mAdc, V _{CE} = 10 Vdc	2N2218; A; 2N2218AL 2N2219; A; 2N2219AL		40 100	120 300	
I _C = 500 mAdc, V _{CE} =10 Vdc	2N2218; A; 2N2218AL 2N2219; A; 2N2219AL		20 30		
Collector-Emitter Saturation Voltage I _C = 150 mAdc, I _B = 15 mAdc	2N2218; 2N2219 2N2218A; L; 2N2219A; L	V _{CE(sat)}		0.4 0.3	Vdc
I _C = 500 mAdc, I _B = 50 mAdc	2N2218; 2N2219 2N2218; L; 2N2219A; L			1.6 1.0	
Base-Emitter Saturation Voltage I _C = 150 mAdc, I _B = 15 mAdc	2N2218; 2N2219 2N2218A; L, 2N2219A, L	V _{BE(sat)}	0.6 0.6	1.3 1.2	Vdc
I _C = 500 mAdc, I _B = 50 mAdc	2N2218; 2N2219 2N2218A; L; 2N2219A; L			2.6 2.0	

DYNAMIC CHARACTERISTICS

Magnitude of Small-Signal Forward Current Transfer Ratio I _C = 20 mAdc, V _{CE} = 20 Vdc, f = 100 MHz	h _{fe}	2.5	12	
Small-Signal Forward Current Transfer Ratio I _C = 1.0 mAdc, V _{CE} = 10 Vdc, f = 1.0 kHz				
I _C = 1.0 mAdc, V _{CE} = 10 Vdc, f = 1.0 kHz 2N2218 2N2219 2N2218A, L 2N2219A, L	h _{fe}	25 50 35 75		
Output Capacitance V _{CB} = 10 Vdc, I _E = 0, 100 kHz ≤ f ≤ 1.0 MHz	C _{obo}		8.0	pF
Input Capacitance V _{EB} = 0.5 Vdc, I _C = 0, 100 kHz ≤ f ≤ 1.0 MHz	C _{ibo}		25	pF
SWITCHING CHARACTERISTICS				
V _{CC} = 30 Vdc; I _C = 150 mAdc; I _{B1} = 15 mAdc				
Turn-On Time (See Figure 3 of MIL-PRF-19500/251)	2N2218, 2N2219 2N2218A, L, 2N2219A, L	t _{on}	40 35	ns
Turn-Off Time (See Figure 4 of MIL-PRF-19500/251)	2N2218, 2N2219 2N2218A, L, 2N2219A, L	t _{off}	250 300	ns

(3) Pulse Test: Pulse Width = 300µs, Duty Cycle ≤ 2.0%.