

9097247 TOSHIBA. ELECTRONIC

02E 17463 D

TA7641BP
TA7641BF

T-77-05-05

AM 1 CHIP RADIO

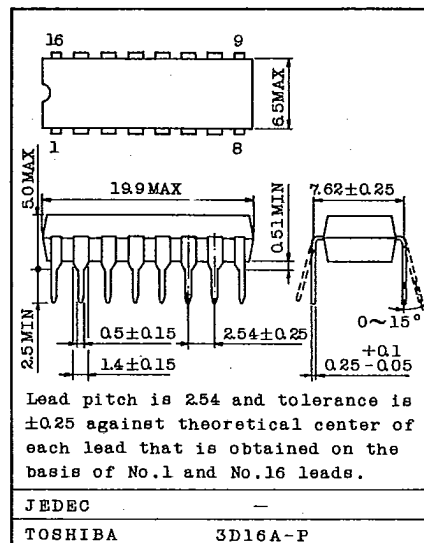
The TA7641BP is designed for the portable AM Radio applications and provides all of the functions from the converter to power amplifier. It is designed to make the quiescent current very small (1.6mA Typ. at $V_{CC}=3V$) by use of the idle current control circuit. So it is capable to design the portable radio set with merit that the battery life is very long.

- Low Quiescent Current: $I_{CCQ}=1.6mA$ (Typ.) at $V_{CC}=3V$
- Operating Supply Voltage Range: $V_{CC}=2\sim 5V$
- High Power Efficiency
- Power Output: $P_O=100mW$ (Typ.) at $THD=10\%$
- The Item is Different Each Outlines.

TA7641BP; Dual in Line Package..Outline 3D16A-P

TA7641BF; Flat Package.....Outline F16GA1-P

Unit in mm

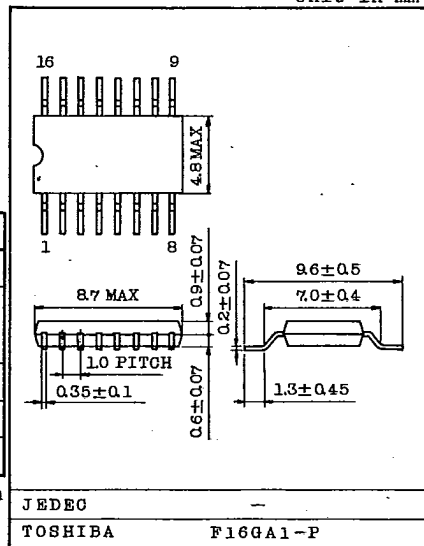
MAXIMUM RATINGS ($T_a=25^{\circ}C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V_{CC}	6	V
Power Dissipation (Note)	TA7641BP	750	mW
	TA7641BF	350	
Output Current (Peak)	$I_O(\text{peak})$	0.2	A
Operating Temperature	T_{opr}	$-10\sim 60$	$^{\circ}C$
Storage Temperature	T_{stg}	$-55\sim 150$	$^{\circ}C$

Note: TA7641BP: Derated above $T_a=25^{\circ}C$ in the proportion of $6mW/^{\circ}C$.

TA7641BF: Derated above $T_a=25^{\circ}C$ in the proportion of $2.8mW/^{\circ}C$.

Unit in mm



TOSHIBA

9097247 TOSHIBA. ELECTRONIC

02E 17464 D

TA7641BP**TA7641BF**

T-77-05-05

ELECTRICAL CHARACTERISTICS

(Unless otherwise specified,

 $V_{CC}=3V$, $f=1MHz$, $f_m=1kHz$, $Mod=30\%$, $R_g=50\Omega$, $R_L=8\Omega$, $T_a=25^\circ C$)

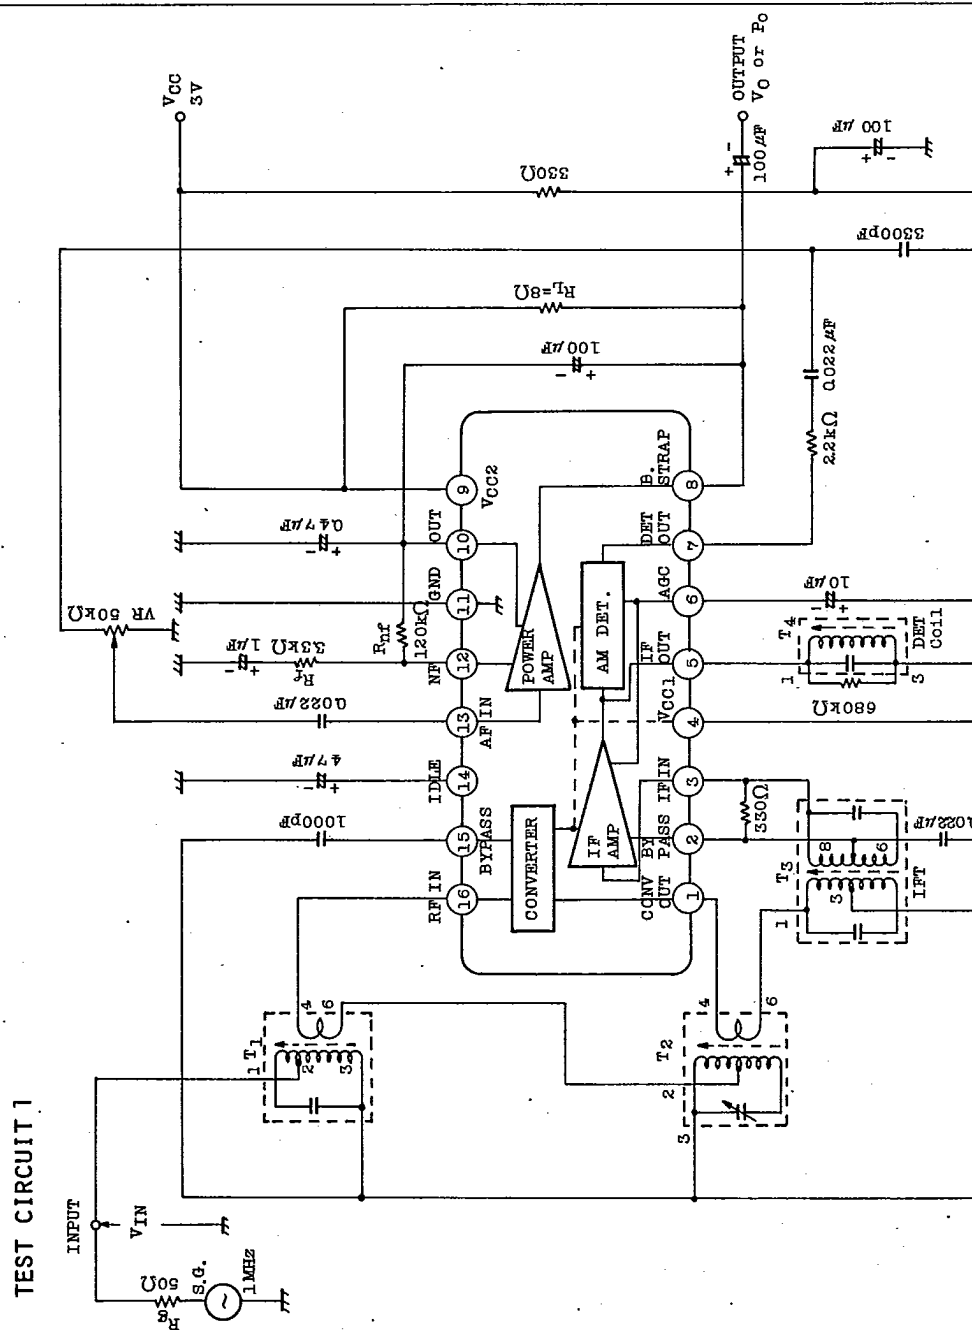
CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Quiescent Current	I_{CCQ}	1	$V_{IN}=0$	0.7	1.6	3.0	mA
Maximum Sensitivity	GSM	1	$V_{IN}=20dB\mu V$, $V_R=Max.$	200	-	-	mVrms
Output Power	P_o	1	$V_{IN}=42dB\mu V$, $V_R=Max.$ $R_L=8\Omega$	80	100	-	mW
Maximum Output Power	P_{OM}	1	Power Amp. Only	-	150	-	mW
Total Harmonic Distortion	THD	1	$V_{IN}=42dB\mu V$	-	2	6	%
Signal to Noise Ratio	S/N	1	$V_o=200mV_{rms}$ ($V_R=control$)	-	44	-	dB
Output Noise Voltage	V_{NOISE}	1	$V_{IN}=0$, $V_R=Max.$	-	3.5	-	mVrms
16 Pin Parallel Input Impedance	r_{ip} 16	2	$f=1MHz$	-	500	-	k Ω
	C_{ip} 16	2		-	2.5	-	pF
1 Pin Parallel Output Impedance	r_{op} 1	3	$f=1MHz$	-	500	-	k Ω
	C_{op} 1	3		-	3.9	-	pF
3 Pin Parallel Input Impedance	r_{ip} 3	4	$f=500kHz$	-	60	-	k Ω
	C_{ip} 3	4		-	2.2	-	pF
5 Pin Parallel Output Impedance	r_{op} 5	5	$f=500kHz$	-	100	-	k Ω
	C_{op} 5	5		-	3.0	-	pF

AUDIO LINEAR IC

02E 17465 D

TA7641BP
TA7641BF

T-77-05-05



TEST CIRCUIT 1

TOSHIBA


9097247 TOSHIBA. ELECTRONIC

02E 17466 D

TA7641BP
TA7641BF

T-77-05-05

COIL DATA

T₁ Antenna Coil


(Bottom View)

f (kHz)	L(μH)	Q ₀	Turns		
	1-3	1-3	1-2	2-3	4-6
300	600	115	2	130	8

TOKO

JA-1302 or Equivalent

Wire : 0.07mmφUEW

T₂ OSC Coil


(Bottom View)

f (kHz)	L(μH)	Q ₀	Turns		
	1-3	1-3	1-2	2-3	4-6
796	360	125	92 $\frac{1}{2}$	8	10 $\frac{1}{2}$

SUMIDA

0187-145-092 or Equivalent

Wire : 0.08mmφUEW

T₃ AM IFT


(Bottom View)

C ₀ (pF)		f (kHz)	Q ₀	Turns			
1-2	7-8		<div>1-2 7-8</div>	1-3	2-3	6-7	6-8
150	150	455	65	80	148	196	32

SUMIDA

48-037-921 or Equivalent

Wire : 0.08mmφUEW

T₄ Detector Coil


(Bottom View)

C ₀ (pF)	f (kHz)	Q ₀	Turns
1-3	1-3	1-3	1-3
180	455	65	142

SUMIDA

0130-108-016 or Equivalent

Wire : 0.08mmφUEW

L₁ Bar Antenna

f (kHz)	L(μH)	Q ₀	Turns	
	1-2	1-2	1-2	3-4
796	625	200MIN	105	20

Core ; 12mmφ × 53mmφ

Wire ; USTC-0.1mmφ

AUDIO LINEAR IC

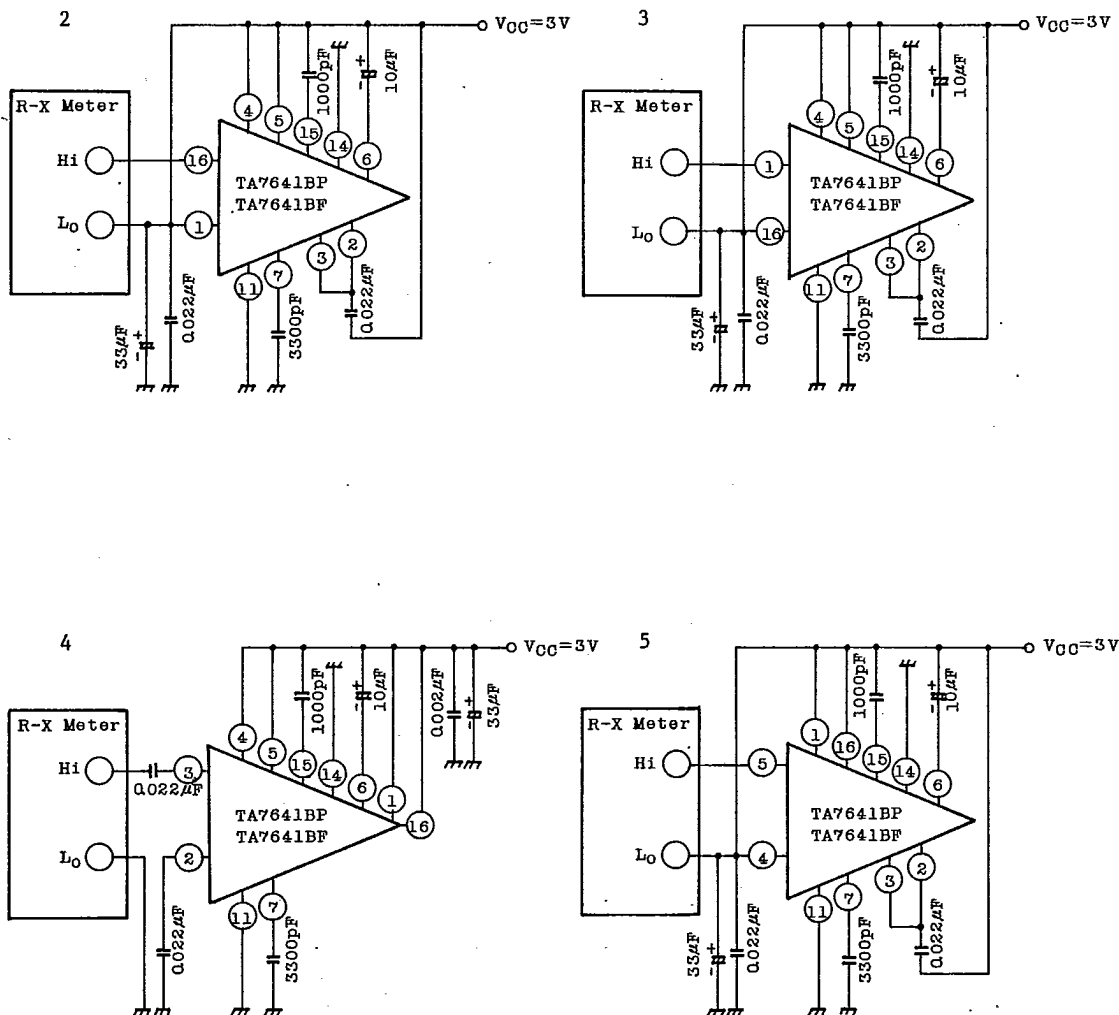
9097247 TOSHIBA, ELECTRONIC

02E 17467 D

TA7641BP
TA7641BF

T-77-05-05

TEST CIRCUIT



TOSHIBA

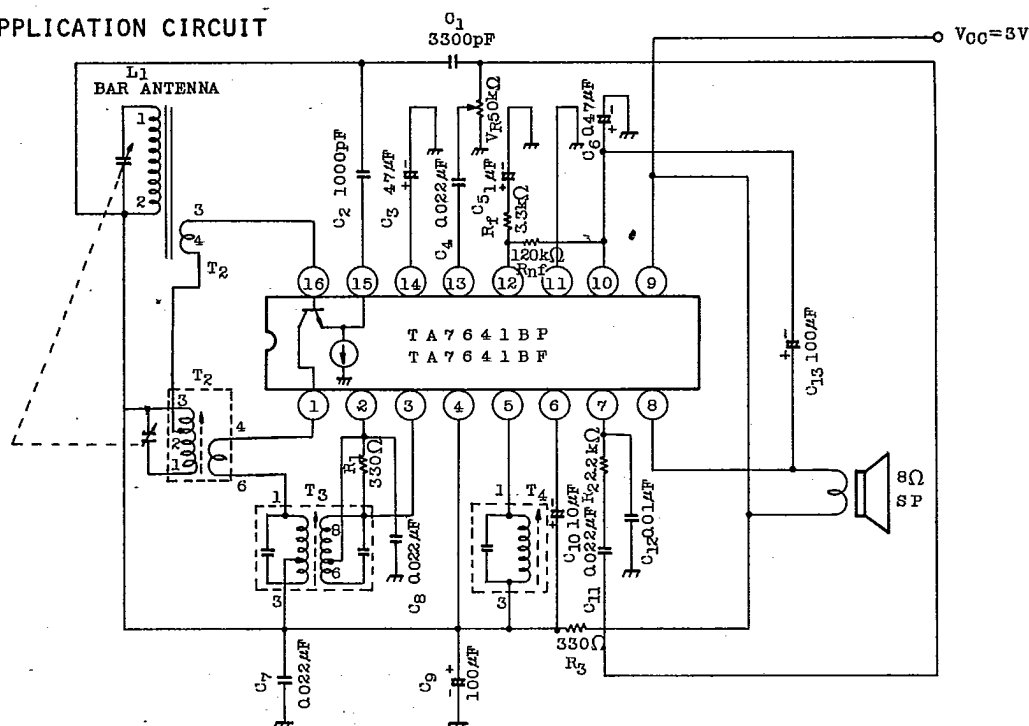
9097247 TOSHIBA. ELECTRONIC

02E 17468 D

TA7641BP**TA7641BF**

T-77-05-05

APPLICATION CIRCUIT



ELECTRICAL CHARACTERISTICS

(Unless otherwise specified $T_a=25^\circ\text{C}$, $V_{CC}=3\text{V}$, $f=1\text{MHz}$, $f_m=1\text{kHz}$, $\text{Mod.}=30\%$, $R_L=8\Omega$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	TYP. VALUE	UNIT
Quiescent Current	I_{CCQ}	$E_{IN}=0\text{dB/m}$	1.6	mA
Maximum Sensitivity	MS	$P_O=5\text{mW}$	41	dB/m
Quieting Sensitivity	QS	$S/N=20\text{dB}$	49	dB/m
Signal to Noise Ratio	S/N	$E_{IN}=74\text{dB/m}$	44	dB
AGC Ratio (Note 1)	AGC (FOM)	-10dB Output Reduction (from 100dB/m)	50	dB
Recovered Output Voltage	V_{OD}	$E_{IN}=74\text{dB/m}$, Measure Pin 7	131	mV_{rms}
Power Amplifier Voltage Gain (Note 2)	G_V	$R_{nf}=120\text{k}\Omega$, $R_f=3.3\text{k}\Omega$	26	dB
Output Power	P_O	THD=10%	100	mW
Total Harmonic Distortion	THD	$E_{IN}=74\text{dB/m}$	2	%

Note 1. The AGC Ratio is defined as the input electric field intensity ratio between the output voltage at 100dB/m and -10dB output voltage.

2. The open loop voltage gain of the power amplifier is typical 33dB.

AUDIO LINEAR IC

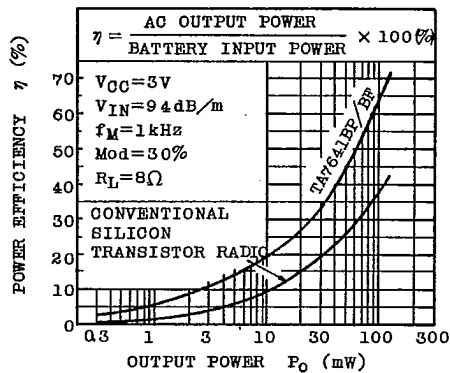
9097247 TOSHIBA, ELECTRONIC

02E 17469 D

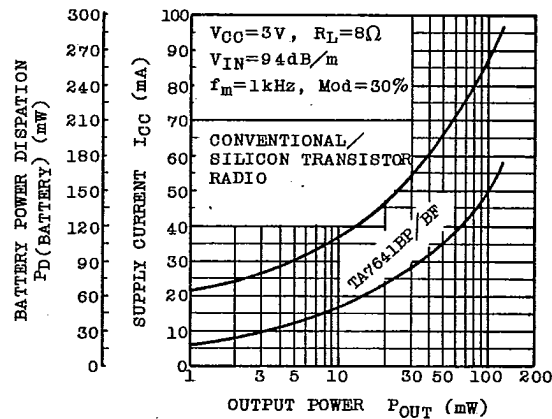
TA7641BP
TA7641BF

T-77-05-05

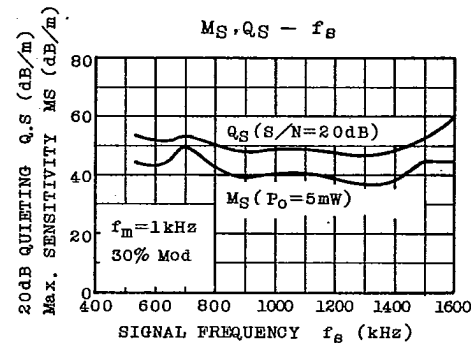
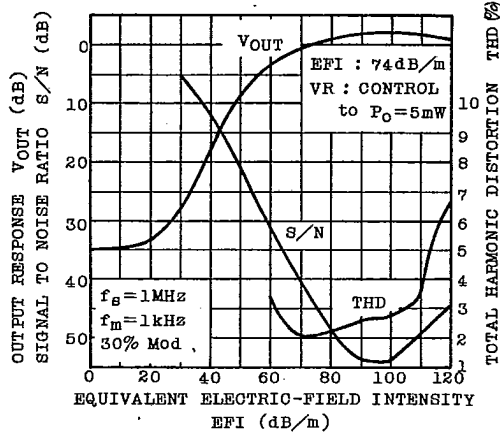
$\eta - P_o$
CHARACTERISTIC COMPARISON



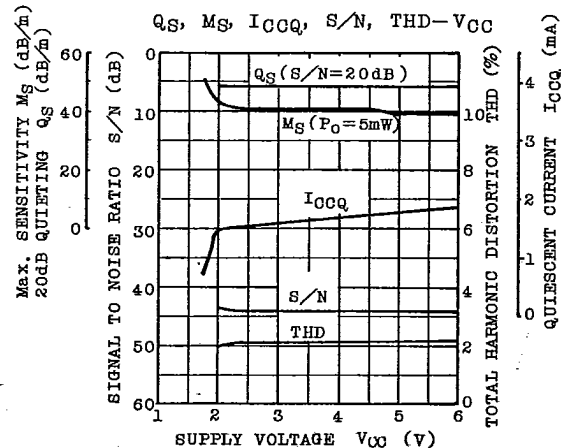
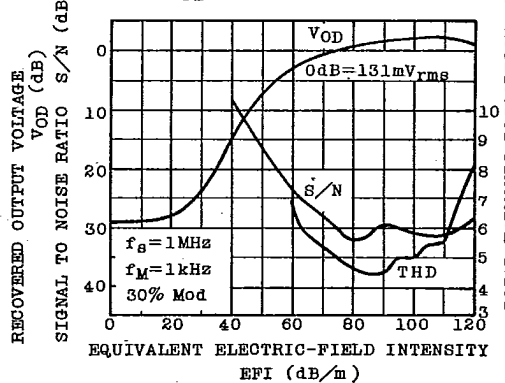
$P_D(\text{BATTERY}), I_{CC} - P_{OUT}$
CHARACTERISTIC COMPARISON



$V_{OUT}, S/N, \text{THD} - \text{EFI}$



$V_{OD}, S/N, \text{THD} - \text{EFI}$



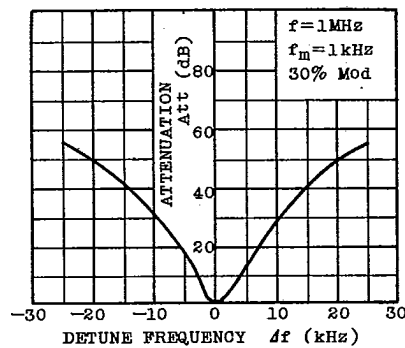
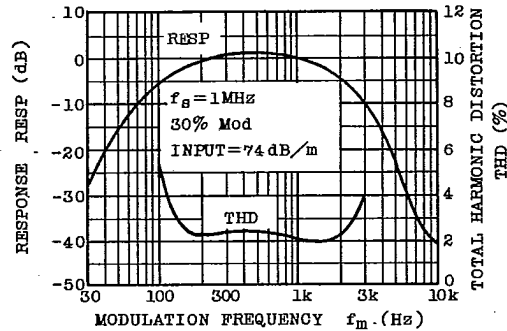
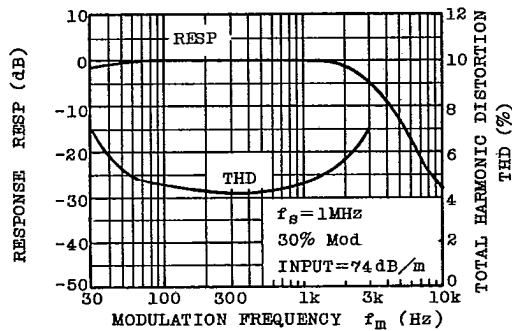
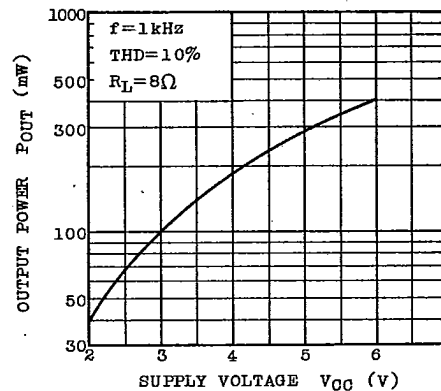
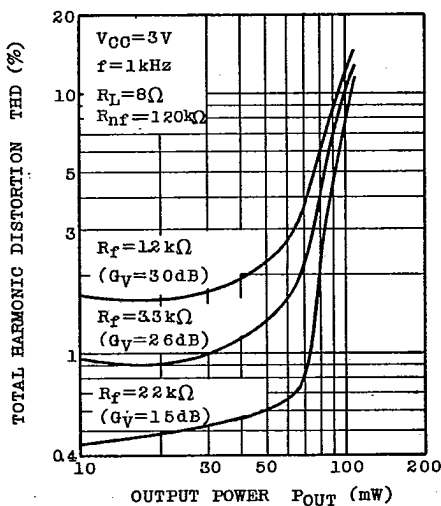
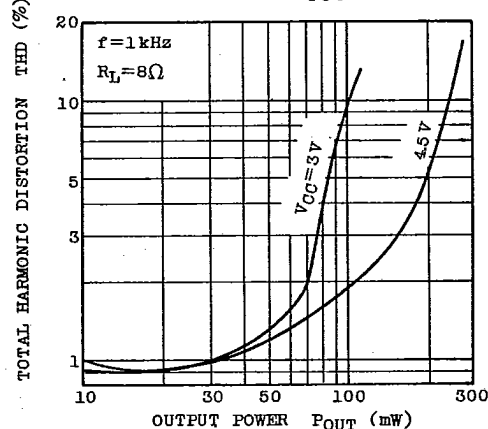
TOSHIBA

9097247 TOSHIBA. ELECTRONIC

02E 17470 D

TA7641BP**TA7641BF**

T-77-05-05

Att - Δf (SELECTIVITY)RESP, THD- f_m (8 PIN TERMINAL)RESP, THD- f_m (7 PIN TERMINAL)P_{OUT} - V_{CC}THD - P_{OUT}THD - P_{OUT}

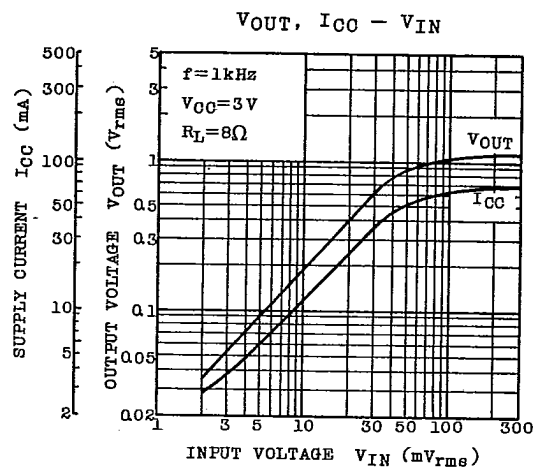
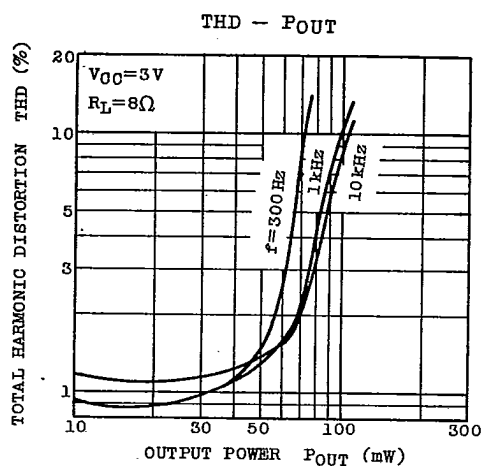
AUDIO LINEAR IC

9097247 TOSHIBA, ELECTRONIC

02E 17471 D

TA7641BP
TA7641BF

T-77-05-05

**TOSHIBA**